




XQ-673H Power Switch Replacement

This guide will show the owner how to take apart the device and show the owner how to replace the power switch.

Written By: Sean Perry

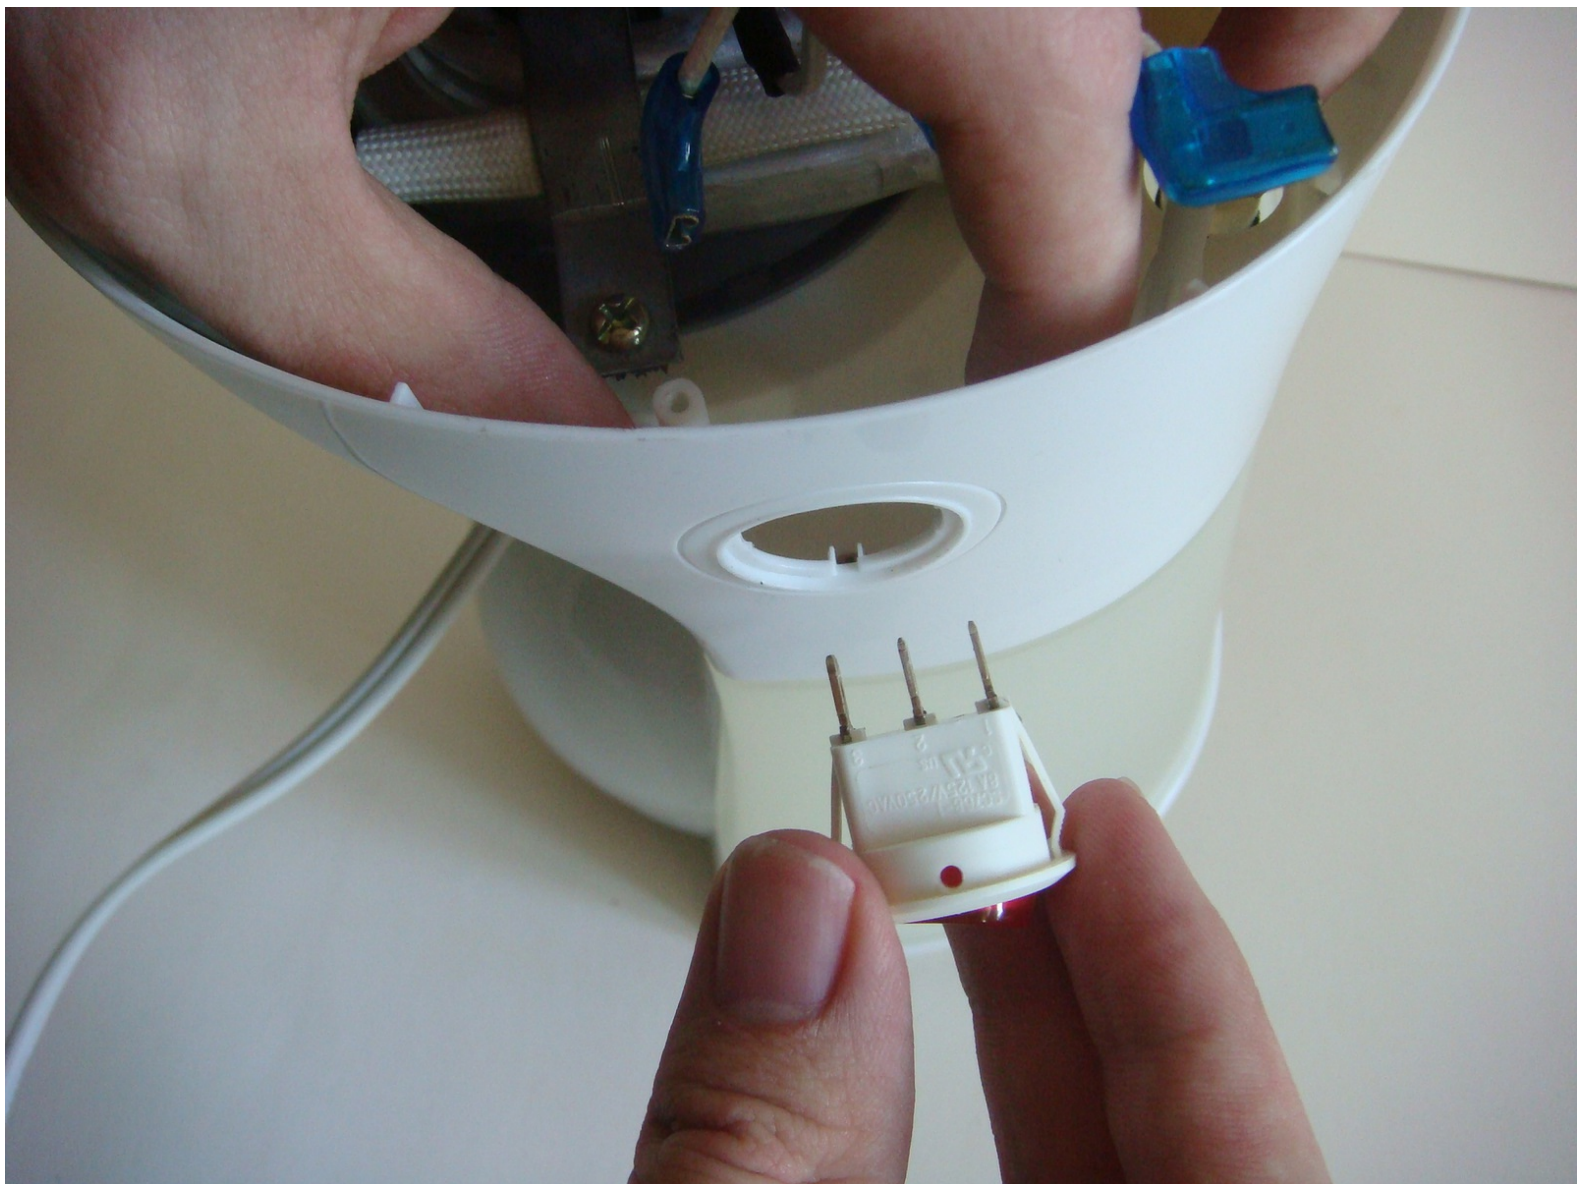

INTRODUCTION

This guide will help the owner of a Kitchen Gourmet XQ-673H replace the power switch.



TOOLS:

- [Flathead 3/32" or 2.5 mm Screwdriver](#) (1)
 - [Phillips #1 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
 - [Spudger](#) (1)
-



Step 1 — Power Switch



- Turn the Kitchen Gourmet upside down.


⚠ Make sure the device is unplugged before continuing.

Step 2

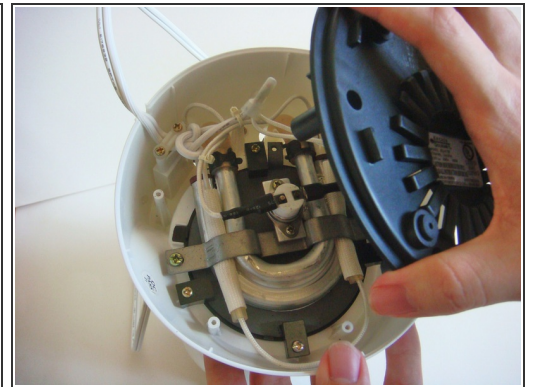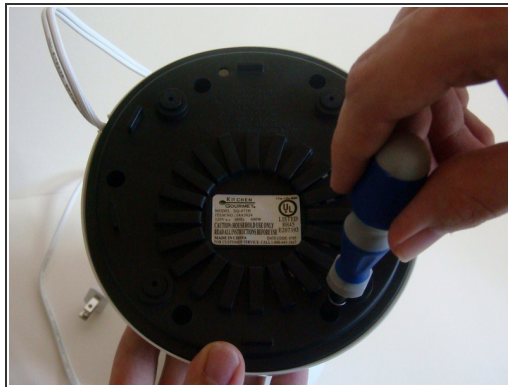


- Using a phillips #1 screwdriver, remove the six 10mm screws found on the bottom of the device.
- Remove the bottom cover.

Step 3

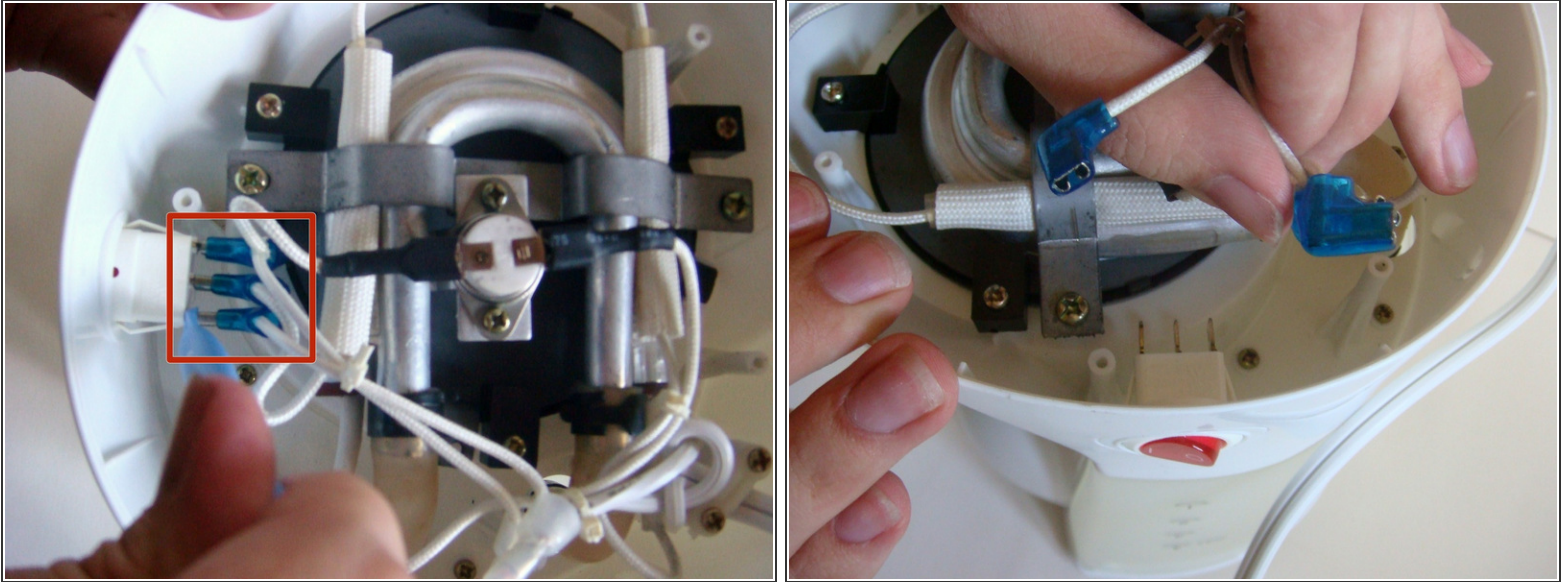

- Using a Plastic Opening Tool, carefully slide back the three power connectors for the Power Switch until fully removed.

Step 4

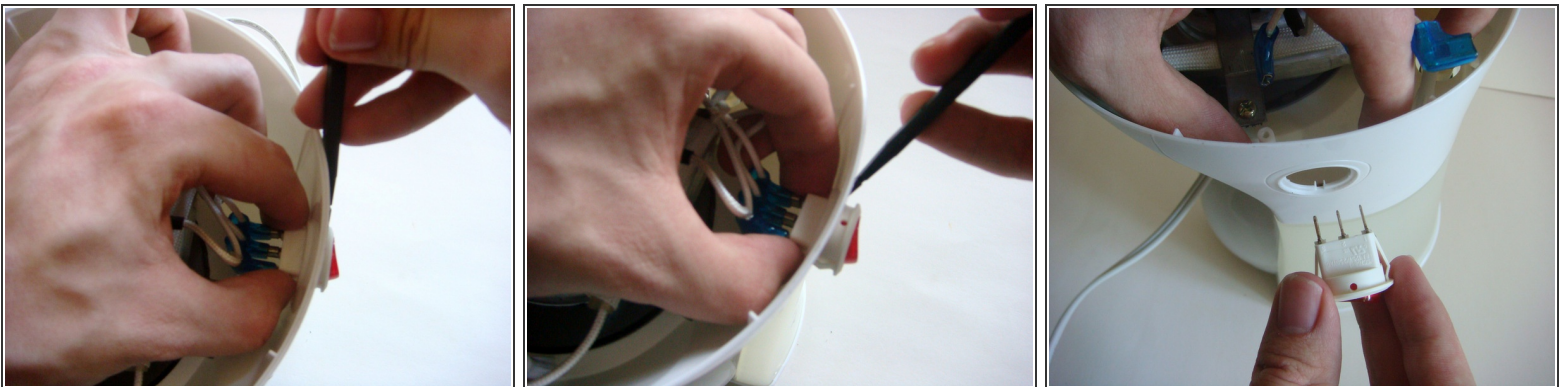

- Gently squeeze the sides of the Power Switch, while using a Spudger to help pop out the Power Switch.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-21 06:50:30 AM.